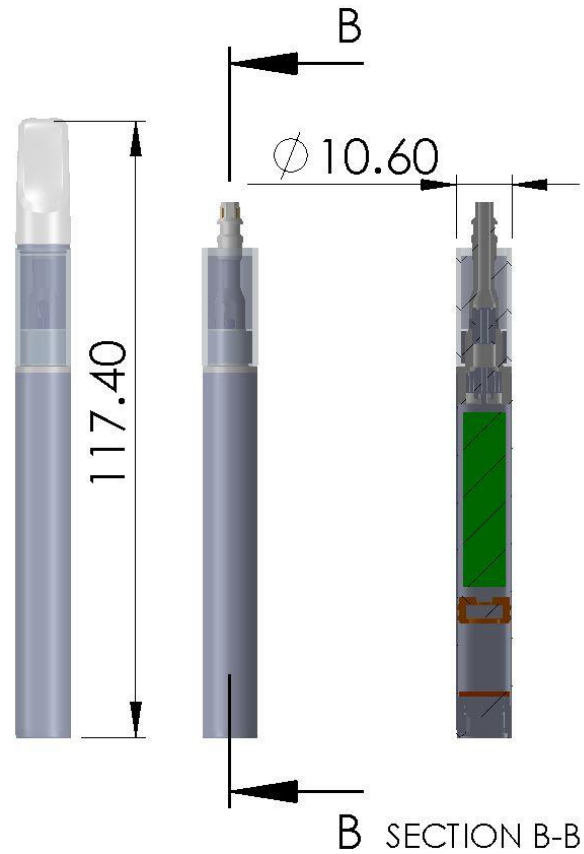

	DOCUMENT NO:	CDS-LX3959-295XXXX	VER:	1.0
	Blanc disposable			EFFECTIVE DATE:
APPROVAL:	ECO-275	Jupiter PN(s):	LX3959-295XXXX	PAGE 1 OF 4




Description: Rechargeable vape pen, top fill cartridge design

Features:

- CCELL Technology atomizer – heating element embedded in porous ceramic
- Breath actuated
- 190 mAh Li-ion battery cell
- Tamper resistant press-fit mouthpiece
- Micro-USB type charger
- Operational viscosity ranges from 1,000 - 700,000 cPs @ 25°C [77°F]


	DOCUMENT NO:	CDS-LX3959-295XXXX	VER:	1.0
	Blanc disposable			EFFECTIVE DATE:
APPROVAL:	ECO-275	Jupiter PN(s):	LX3959-295XXXX	PAGE 2 OF 4

Specifications		
Internal Volume	Gross	0.5ml
	Max. fill volume	0.5ml
Weight, empty with Mouthpiece	18	
Power	Standard power is 9W (3.5V & 1.4ohm)	
Activation Time	0-10s; Other time durations available by request	
Fluid Inlet Diameter	Standard inlet diameter is 2.0mm; Other options available by request, see part number legend	
Number of inlets	4	
Viscosity Range	1,000 - 700,000 cPs @ 25°C [77°F]	
Wetted Materials	Fluid Housing	Glass
	Airway, atomizer shell	Zirconia Ceramic
	Heating element	Nichrome
	Wick	Improved CCELL Ceramic
	Atomizer retaining wrap	Cellulose
	Seals	Silicone
	Battery Housing	Stainless steel
Battery Cell Capacity	190 mAh	
Max. Current Output	3 A	
Recommended closing force	33.72lbs	
Safety Features	Short-Circuit Protection	When the resistance of loading less than 0.4(±0.2)Ω, power will turn off. The LED keep shining 2 seconds then turn off.

	DOCUMENT NO:	CDS-LX3959-295XXXX	VER:	1.0
	Blanc disposable			EFFECTIVE DATE: 02/10/2023
APPROVAL:	ECO-275	Jupiter PN(s):	LX3959-295XXXX	PAGE 3 OF 4

	Over-Usage Protection	When Any time suctioning lasts for more than 10(±2)S, the power will cut off, and the LED will flash two times then turn off
Low Battery Indication	LED flashes 10 X	
Full charge indication	When battery is fully charge, the LED blinks 20 times and then turns off.	
Charging functionality	The standard charging voltage is 5V and the charging current is more than or equal to 500mA	
Branding Options	Available with MOQ	
Operating Temperature and Humidity	<ul style="list-style-type: none"> ○ Charging Temperature: 10°C to 45°C ○ Working Temperature: 0°C to 60°C ○ Operating humidity: 35% to 70% 	
Storage Temperature and Humidity	<ul style="list-style-type: none"> ○ Storage Temperature: 23 ± 5 °C ○ Storage Humidity: 35% to 70% 	
Safety Certifications	<ul style="list-style-type: none"> ○ RoHS ○ FCC ○ CE 	
Part Number Legend – LX3959-295XXXX-YYY-ZZZ		
<ul style="list-style-type: none"> ● YYY -> Cartridge Power <ul style="list-style-type: none"> ○ 009 for (3.5V & 1.4ohm) 	<ul style="list-style-type: none"> ● ZZZ -> Fluid Inlet Dia. <ul style="list-style-type: none"> ○ 002 for 2.0mm ○ 206 for 2.6mm ○ 105 for 1.5mm 	<ul style="list-style-type: none"> ● Mouthpiece – <ul style="list-style-type: none"> ○ L611200-13108

**XXXX digits denote product branding*

	DOCUMENT NO:	CDS-LX3959-295XXXX	VER:	1.0
	Blanc disposable			EFFECTIVE DATE:
APPROVAL:	ECO-275	Jupiter PN(s):	LX3959-295XXXX	PAGE 4 OF 4

Jupiter Blanc Filling instructions

1. Insert a blunt tipped needle between the airway and reservoir. Holding upright, fill 0.5ml oil into space around center post.
***Do NOT overfill**
***Do NOT allow oil to enter airway**
2. Check if the silicon sealing ring is set in place properly.
3. Immediately after filling, place the mouthpiece on top of the body aligned with reservoir horizontally and press into position.
***Failure to insert the mouthpiece immediately may cause leakage. It is recommended to insert the mouthpiece in less than 1 minute after filling, but this will change based on oil viscosity.**
4. Check if mouthpiece is pressed in completely and properly. Let filled product sit for 30 min before using.
***Saturation time will change based on oil viscosity**

For Technical Assistance please contact us at:
CS@JupiterResearch.com

